


* This is an OEM Only Product

Features

- PICMG® COM Express® Carrier Board Revision 3.0 supports Type 10 COMe Mini modules
- 1 x LVDS, 1 x eDP, 1 x DP, 1 x HDMI
- 1 PCIe x4 Slot
- 1 x LAN
- 6 x USB 2.0, 2 x USB 3.1(Gen1)
- Mic-in, Line-out
- 2 x SATA III, 1 x COMe connector, 1 x SDIO, 1 x IET, 1 x Fan
- Type 10 Pin-out

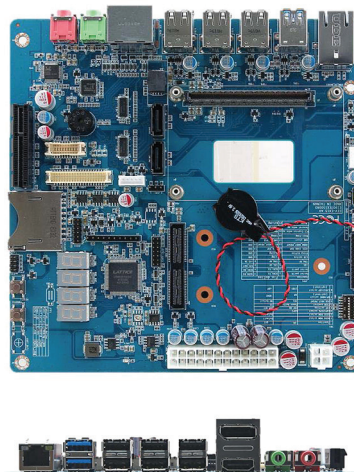


Specifications


System	
Form Factor	Mini-ITX
External I/O	
Expansion	1 x PCIe x4
Video	1 x LVDS 1 x eDP 1 x DP 1 x HDMI
USB	2 x USB 3.1(Gen1, contain 2 x USB2.0) 6 x USB2.0
LAN	1 x RJ45
SATA	2 x SATA III
DIO	1 x 8bit GPIO
Audio	(Mic-in & Line-out)
Other	1 x SDIO/DIO (optional)

Mechanical & Environment	
Power Type	ATX
Operating Temperature	0°C to 60°C (32°F - 140°F)
Storage Temperature	-40°C ~ 75°C (-40°F - 167°F)
Operating Humidity	40°C @ 95% Relative Humidity, Non-condensing
Dimensions	6.7" x 6.7" (170mm x 170mm)
Weight	0.88 lbs (0.4kg)
Certification	CE, FCC Class B

Expansion board for 4 LAN Ports

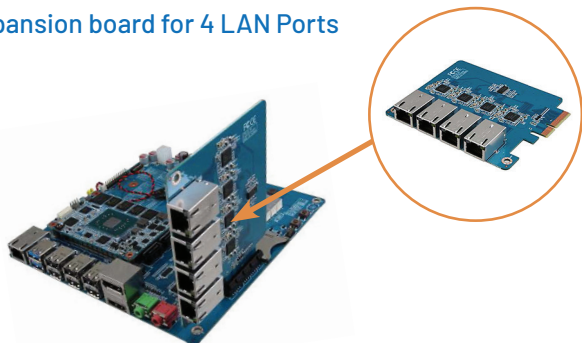

Expansion board for 4 PCIe

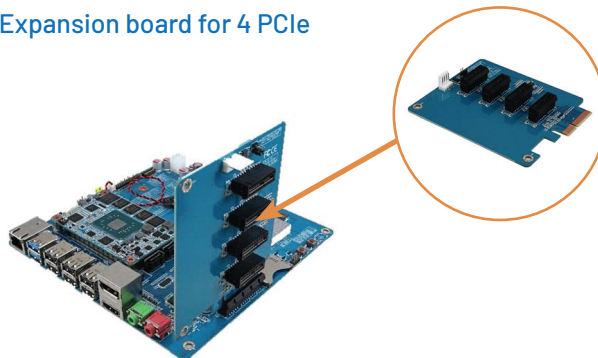

Ordering Info

EEV-EX15-B1R Type 10 Mini ITX Evaluation Board for ESM-APLM Rev 3.0 A1 (with 2 expansion boards & I/O shield)

* All product specifications and images are subject to change without notice. Last update: 07/22/2021