

ECS-APCO

Intel Celeron N3350/N4200 Fanless System

Quick Reference Guide

2nd Ed –16 April 2019

Copyright Notice

Copyright © 2019 ALL RIGHTS RESERVED.

FCC Statement



THIS DEVICE COMPLIES WITH PART 15 FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS:

- (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE.
- (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRE OPERATION.

THIS EQUIPMENT HAS BEEN TESTED AND FOUND TO COMPLY WITH THE LIMITS FOR A CLASS "A" DIGITAL DEVICE, PURSUANT TO PART 15 OF THE FCC RULES.

THESE LIMITS ARE DESIGNED TO PROVIDE REASONABLE PROTECTION AGAINST HARMFUL INTERFERENCE WHEN THE EQUIPMENT IS OPERATED IN A COMMERCIAL ENVIRONMENT. THIS EQUIPMENT GENERATES, USES, AND CAN RADIATE RADIO FREQUENCY ENERGY AND, IF NOT INSTALLED AND USED IN ACCORDANCE WITH THE INSTRUCTION MANUAL, MAY CAUSE HARMFUL INTERFERENCE TO RADIO COMMUNICATIONS.

OPERATION OF THIS EQUIPMENT IN A RESIDENTIAL AREA IS LIKELY TO CAUSE HARMFUL INTERFERENCE IN WHICH CASE THE USER WILL BE REQUIRED TO CORRECT THE INTERFERENCE AT HIS OWN EXPENSE.

Copyright Notice

Copyright © 2019 ALL RIGHTS RESERVED.

No part of this document may be reproduced, copied, translated, or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the prior written permission of the original manufacturer.

Disclaimer

We reserve the right to make changes, without notice, to any product, including circuits and/or software described or contained in this manual in order to improve design and/or performance. We assume no responsibility or liability for the use of the described product(s), conveys no license or title under any patent, copyright, or masks work rights to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified. Applications that are described in this manual are for illustration purposes only. We make no representation or warranty that such application will be suitable for the specified use without further testing or modification.

CONTENT

- 1. Getting Started4**
 - 1.1 Safety Precautions4
 - 1.2 Packing List4
 - 1.3 System Specifications5
 - 1.4 System Overview.....8
 - 1.4.1 Front/Rear View 8
 - 1.5 System Dimensions.....9
- 2. Hardware Configuration.....10**
 - 2.1 ECS-APCO connector mapping11
 - 2.1.1 Serial Port connector (COM)..... 11
 - 2.2 Installing Hard Disk (ECS-APCO).....12

1. Getting Started

1.1 Safety Precautions

Warning!



Always completely disconnect the power cord from your chassis whenever you work with the hardware. Do not make connections while the power is on. Sensitive electronic components can be damaged by sudden power surges. Only experienced electronics personnel should open the PC chassis.

Caution!



Always ground yourself to remove any static charge before touching the CPU card. Modern electronic devices are very sensitive to static electric charges. As a safety precaution, use a grounding wrist strap at all times. Place all electronic components in a static-dissipative surface or static-shielded bag when they are not in the chassis.

1.2 Packing List

- 1 x ECS-APCO Intel Celeron N3350/N4200 Fanless System
- Other major components include the followings:
 - 1 x Screw Kit for HDD/SSD/M.2
 - 1 x Adapter
 - 1 x Power Cord (EU)



If any of the above items is damaged or missing, contact your retailer.

1.3 System Specifications

System	
Mother Board	<ul style="list-style-type: none"> EPX-APLP
CPU	<ul style="list-style-type: none"> Onboard Intel® Celeron® N3350 processor Onboard Intel® Celeron® N4200 processor
CPU Cooler (Type)	<ul style="list-style-type: none"> Fanless
Memory	<ul style="list-style-type: none"> 1 x 204-pin 2GB DDR3L 1600MHz SO-DIMM socket, supports up to 8GB (Default: 1 x 2GB DDR3L)(**1333MHz is not tested)
Adapter	<ul style="list-style-type: none"> 60W Adapter (DC in 12V@5A)
Microphone	<ul style="list-style-type: none"> 1 x Mic-in
Speaker	<ul style="list-style-type: none"> 1 x Lin-out
Operating System	<ul style="list-style-type: none"> Windows 10 / Linux
Storage	
Hard Disk Drive	<ul style="list-style-type: none"> 1 x 2.5" HDD/SSD Internal Bracket
External I/O	
Serial Port	<ul style="list-style-type: none"> 1 x RS-232
USB Port	<ul style="list-style-type: none"> 2 x USB3.0 / 4 x USB2.0
Video Port	<ul style="list-style-type: none"> 1 x DP++ (only 3840 x 2160@60Hz is tested, 4096 x 2160 @ 60Hz needs to be further validated when device is available) 1 x HDMI (3840 x 2160 @ 30Hz, 2560 x 1600 @ 30Hz)
Audio Port	<ul style="list-style-type: none"> 1 x Line-out / 1 x Mic-in
LAN Port	<ul style="list-style-type: none"> 2 x Intel I211AT Gigabit Ethernet
Wireless LAN Antenna	<ul style="list-style-type: none"> 2 x SMA Connector (Optional)
Switch	<ul style="list-style-type: none"> 1 x Power on/off button with LED
Indicator Light	<ul style="list-style-type: none"> 1 x Storage LED
Expansion Slots	<ul style="list-style-type: none"> 1 x M.2 Type B 3042/2242/2260 (with 1 x PCI-e x 1, USB 3.0 and SATA Signal) supports SSD. 1 x M.2 Type A 2230 supports Wi-Fi module (1 x PCI-e x 1, USB 2.0 Signal)
Mechanical	
Power Type	<ul style="list-style-type: none"> AT / ATX mode Switchable Through Jumper *Default: ATX mode
Power Connector Type	<ul style="list-style-type: none"> Lockable DC Jack
Dimension	<ul style="list-style-type: none"> 160 x 145.5 x 63mm (L x W x H)
Weight	<ul style="list-style-type: none"> 1.3kg
Color	<ul style="list-style-type: none"> Black
Fanless	<ul style="list-style-type: none"> Yes
Others	<ul style="list-style-type: none"> 1 x Kensington Lock Hole

Reliability	
EMI Test	<ul style="list-style-type: none"> CE/FCC Class A design compatible
Safety	<ul style="list-style-type: none"> UL/CB design compatible
Vibration Test	<ul style="list-style-type: none"> <u>Sine Vibration test (Non-operation)</u> <ul style="list-style-type: none"> Reference IEC60068-2-6 Testing procedures Test Fc : Vibration sinusoidal <ol style="list-style-type: none"> 1 Test Acceleration : 2G 2 Test frequency : 5 ~ 500 Hz 3 Sweep : 1 Oct/ per one minute. (logarithmic) 4 Test Axis : X,Y and Z axis 5 Test time :30 min. each axis 6 System condition : Non-Operating mode <u>Package Vibration Test</u> <ul style="list-style-type: none"> Reference IEC60068-2-64 Testing procedures Test Fh : Vibration broadband random Test <ol style="list-style-type: none"> 1. PSD: 0.026G²/Hz , 2.16 Grms 2. Non-operation mode 3. Test Frequency : 5-500Hz 4. Test Axis : X,Y and Z axis 5. 30 min. per each axis <u>Random Vibration Operation</u> <ul style="list-style-type: none"> Reference IEC60068-2-64 Testing procedures Test Fh : Vibration broadband random Test <ol style="list-style-type: none"> 1. PSD: 0.00454G²/Hz, 1.5 Grms 2. Operation mode 3. Test Frequency : 5-500Hz 4. Test Axis : X,Y and Z axis 5. 30 minutes per each axis 6. IEC 60068-2-64 Test: Fh 7. Storage : SSD or M.2
Mechanical Shock Test	<ul style="list-style-type: none"> <u>Bump Test</u> <ul style="list-style-type: none"> Reference IEC 60068-2-29 Testing procedures Test Eb : Bump Test <ol style="list-style-type: none"> 1. Wave form : Half Sine wave 2. Acceleration Rate : 10g for operation mode 3. Duration Time : 11ms 4. No. of Shock : Z axis 300 times 5. Test Axis: Z axis


	6. Operation mode
Drop Test	<ul style="list-style-type: none"> • <u>Packing Drop</u> • Reference ISTA 2A, Method : IEC-60068-2-32 Test:Ed Test Ea : Drop Test <ol style="list-style-type: none"> 1. One corner , three edges, six faces 2. ISTA 2A, IEC-60068-2-32 Test:Ed
Operating Temperature	<ul style="list-style-type: none"> • -5°C ~ 50°C (23°F ~ 104°F) (w/SSD/N4200), ambient w/ air flow. *If the system (ECS-APCO) operates in extreme environment (temperature beyond 45°C), you should use the SSD that supports the operating temperature 0 ~ 85°C. • 0°C ~ 40°C (32°F ~ 113°F) (w/HDD, M.2 and OEM chassis), ambient w/ air flow
Operating Humidity	<ul style="list-style-type: none"> • 0% ~ 90% Relative Humidity, Non-condensing
Storage Temperature	<ul style="list-style-type: none"> • -20°C ~ 75°C (-4°F ~ 167°F)



Note: Specifications are subject to change without notice.


1.4 System Overview

1.4.1 Front/Rear View

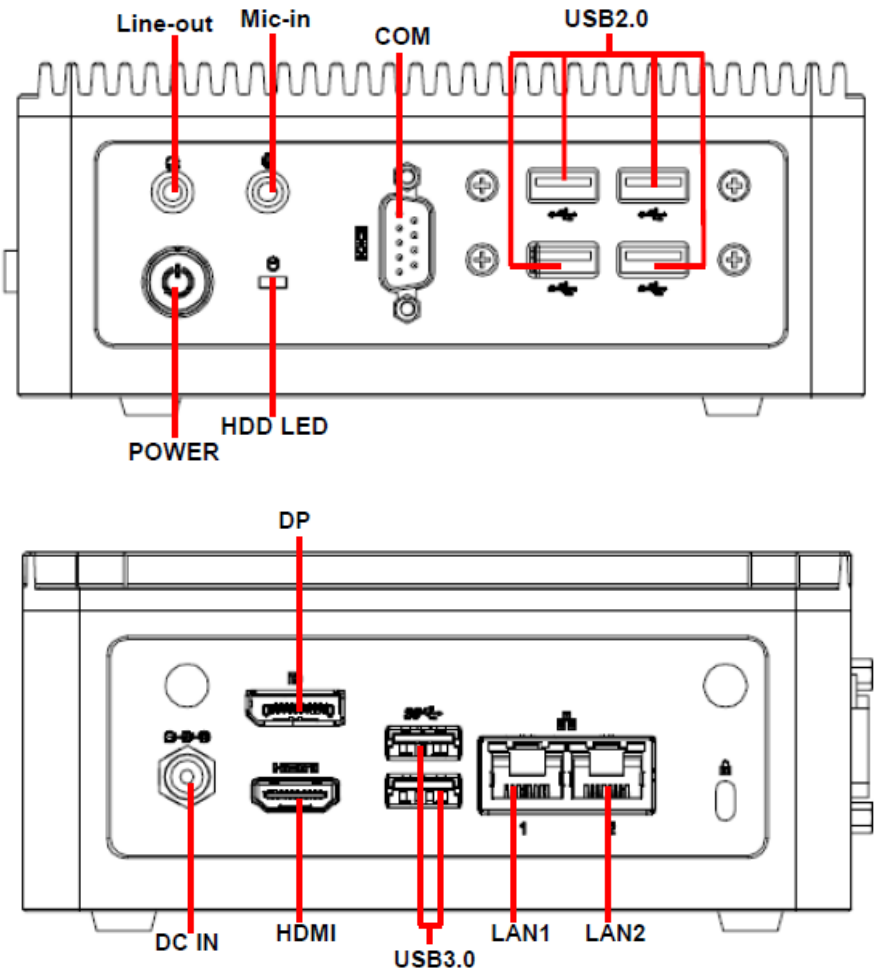

Connectors		
Label	Function	Note
POWER	Power on button	
HDD LED	HDD indicator	
COM	Serial port connector	
USB	4 x USB2.0 connector 2 x USB3.0 connector	
Line-out	Line-out audio jack	
Mic-in	Mic-in audio jack	
DC IN	DC power-in connector	
LAN1/2	RJ-45 Ethernet 1/2	
HDMI	HDMI connector	
DP	DP connector	

1.5 System Dimensions

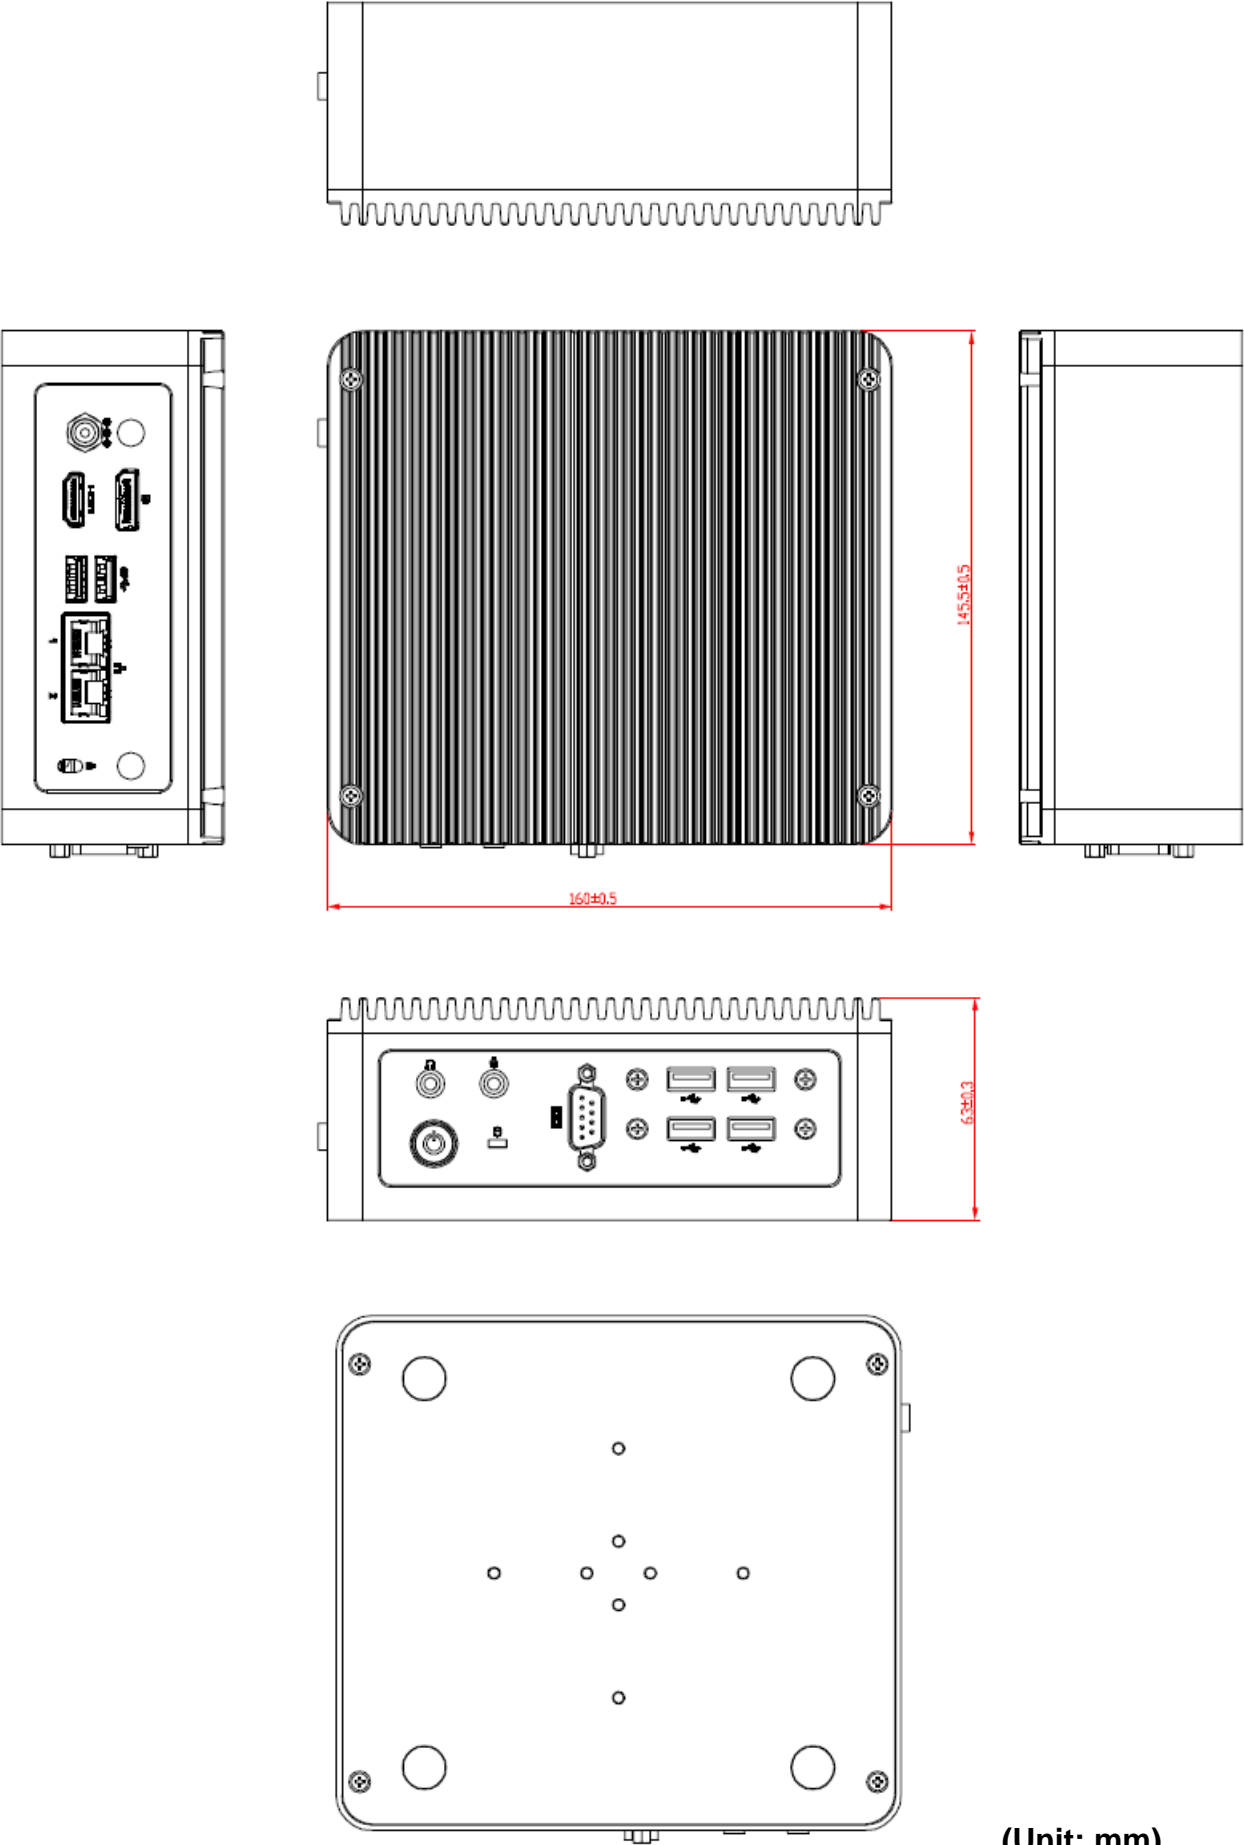



2. Hardware Configuration

For advanced information, please refer to:

- 1- EPX-APLP User's Manual


2.1 ECS-APCO connector mapping

2.1.1 Serial Port connector (COM)

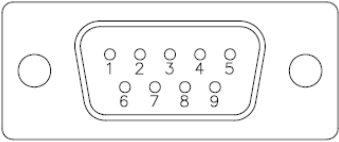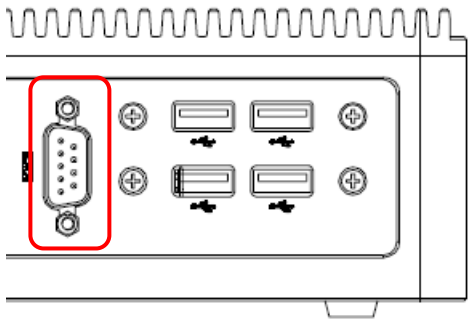


Signal	PIN	PIN	Signal
DCD#	1	6	DSR#
RXD	2	7	RTS#
TXD	3	8	CTS#
DTR#	4	9	RI#
GND	5		


2.2 Installing Hard Disk (ECS-APCO)

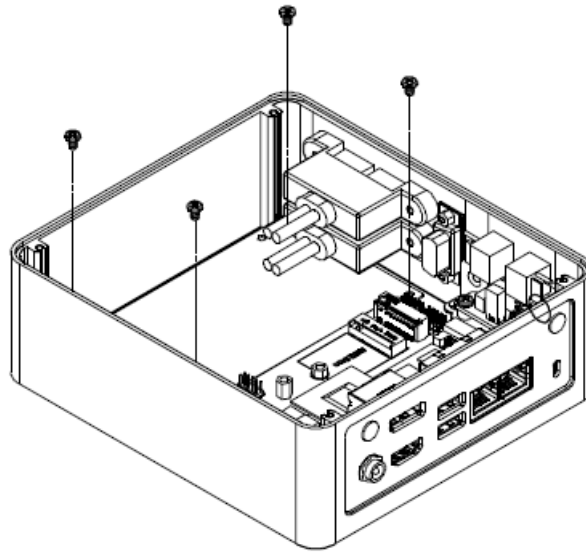


Step1. Take off screws from bottom cover.

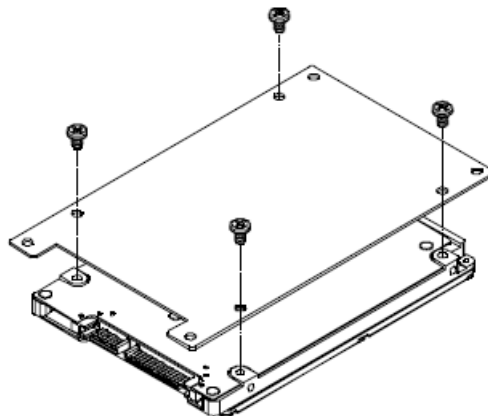

Step2. Fix HDD/SSD with four M3*4L screws.

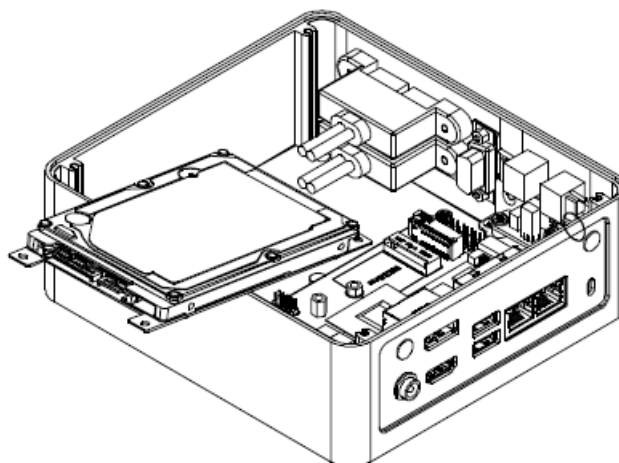

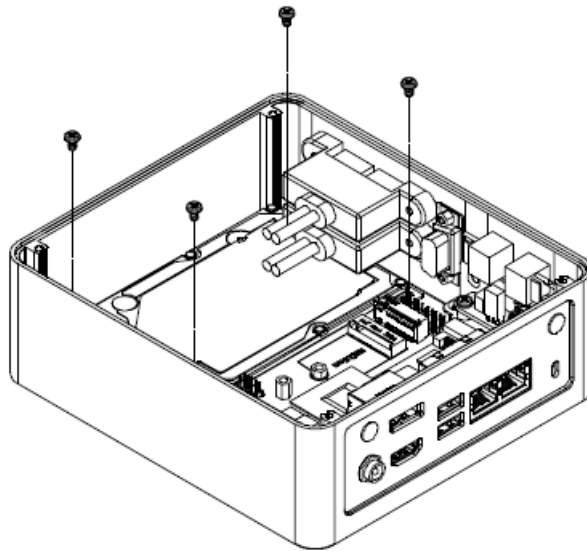

Step3. Install the HDD module and fix it with four M3*4L screws.