


Features

- Motherboard: MX170QD Mini ITX with gold plated connectors
- Intel LGA1151 socket supports 6th/7th generation 14nm Intel Kaby Lake¹ / Skylake Core i7/i5/i3 and Celeron processors
- High Reliability Gold Plating Connectors
- Supports 3 Independent Displays, 2 x DisplayPort, 1 x HDMI
- USB: 4 x USB 3.0 and 2 x USB 2.0, 2 x USB 3.0 OR 2 x USB 2.0
- Storage Interfaces: 1 x M.2, 1 x mSATA, and 1 x 2.5" HDD Drive Bay
- 19V DC Input
- Dimensions: 8.6" x 8" x 3"
- Kaby Lake processors support OS Win 10 and above; support Win 7 with external video cards

¹ Kaby Lake processor support BIOS will be a running change estimated to be in stock starting late Q3/Q4 2017 implementing important new ME code updates. Qual-samples are available now on a limited quantity basis. OS Win 10 and above; support Win 7 with external video cards

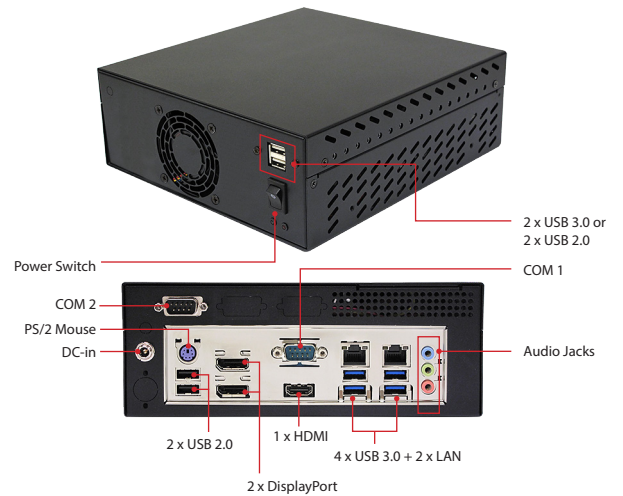

Specifications

System	
CPU	Intel LGA1151 socket supports 6th/7th generation 14nm Intel Kaby Lake ¹ / Skylake Core i7/i5/i3 and Celeron processors
System Chipset	Intel® Q170 PCH Chipset
BIOS	128Mb SPI BIOS
System Memory	2 x (Gold Plated) SODIMM slots support up to 32 GB Dual Channel DDR4 2133 MHz vertical type memory sockets
Video	Intel® Integrated Graphic Engine
Audio Codec	Realtek HD Audio support 7.1 channel sound playback
Ethernet	LAN 1: Intel® I219-LM Gigabit LAN Controller LAN 2: Intel® I211-AT Gigabit LAN Controller
Expansion	1 x Full/Half Size mini-PCIe (mSATA III Support) (Gold Plated) 1 x M.2 Slot (Gold Plated) (Support 2280 and 2242)
System Fan	1 x 60mm
System Indicator	1 x Power LED, 1 x HDD LED, 1 x Momentary Switch
Storage	1 x 2.5" SSD/HDD Drive Bay
External I/O	
KB/MS	1 x PS/2 Mouse
Audio	Line-in, Line-out, Mic-in
LAN	2 x RJ-45
Display Interface	2 x DisplayPort Connectors (Gold Plated) 1 x HDMI Connector (Gold Plated)
USB	Rear: 4 x USB 3.0 and 2 x USB 2.0 Front: 2 x USB 3.0 OR 2 x USB 2.0
COM	2 x COM
Power Input	1 x DC-in

Mechanical & Environment

Power Type	12V, 16 - 24V DC
Power Adapter	Input: 100 ~ 240V / 50 ~ 60Hz Output: 90W Adapter (19V @ 4.73A)
Operating Temp	0 ~ 40°C (32 ~ 104°F)
Storage Temp	-20 ~ 60°C (-4 ~ 140°F)
Relative Humidity	10% ~ 86% Relative Humidity, Non-condensing
Exterior Color	Black
Dimensions	8.587" L x 8.00" W x 3.007" H (218.10mm L x 203.20mm W x 73.68mm H)
Certification Information	CE, FCC Class A
Weight	4.25 lbs

Ordering Info

BI260-170QD	Barebone: Intel® Q170 Mini ITX Barebone System. Memory and HDD are not included
-------------	---

* All product specifications and images are subject to change without notice. Last update: 2021/04/20